



K1:Defination

PIN#	I/□	Description
1	VIN	Power Supply, DC12V
2		
3	NC	No Connected
4	DOUT	Data Out,RS232TXD
5	DIN	Data In,RS232RXD
6		
7	GND	Ground
8		



K1

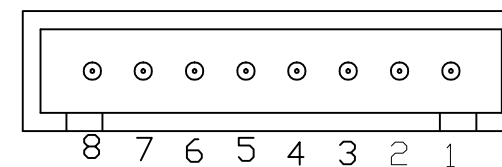

K1(scale 4:1): 8Pin pitch=2.50mm  
Part No: SYUIN 8824-08

- Note:
- \*1. Product Type: 7"-Smart TFT LCD Module
  - \*2. LCD Display Type : TFT,Transmissive
  - \*3. Touch Panel: 4Wire Resistive
  - \*4. Pixel Arrangement: RGB-SPRIPE
  - \*5. Operating Voltage : DC12V
  - \*6. Viewing Direction : 6H
  - \*7. Backlight : White LED
  - \*8. User Interface(K1): RS-232C
  - \*9. Operating Temperature : -20°C~70°C
  - \*10. Storage Temperature : -30°C~80°C

C		
B		
A		
Rev/Note		Date
Dwg Title	HMT070CB-C Outline Dwg	
Dwg No.	MK-004205-1-1	Date 2012-10-22
Scale 1/1	Tol. ±0.5	Unit mm Paper Size A3
Approved	Checked	Drawn

