

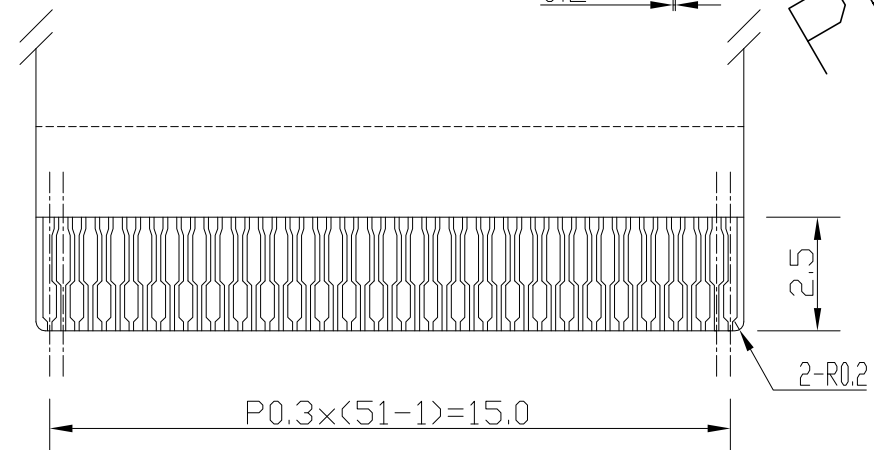



- Note:
- *1. LCD Display Type: TFT, Transmissive
 - *2. Pixel Arrangement: RGB-SPRIPE
 - *3. Color Depth: 16.7M(24bit)
 - *4. Operating Voltage : 3.3V
 - *5. Viewing Direction : 12H
 - *6. Backlight Supply(IL) : 40mA
 - *7. Backlight : 2x 4(serial)LEDs
 - *8. Operating Temperature : -20°C~70°C
 - *9. Storage Temperature : -30°C~80°C
 - *10. FPC Mating Connector : HIROSE FH26-51S-0.3SHW

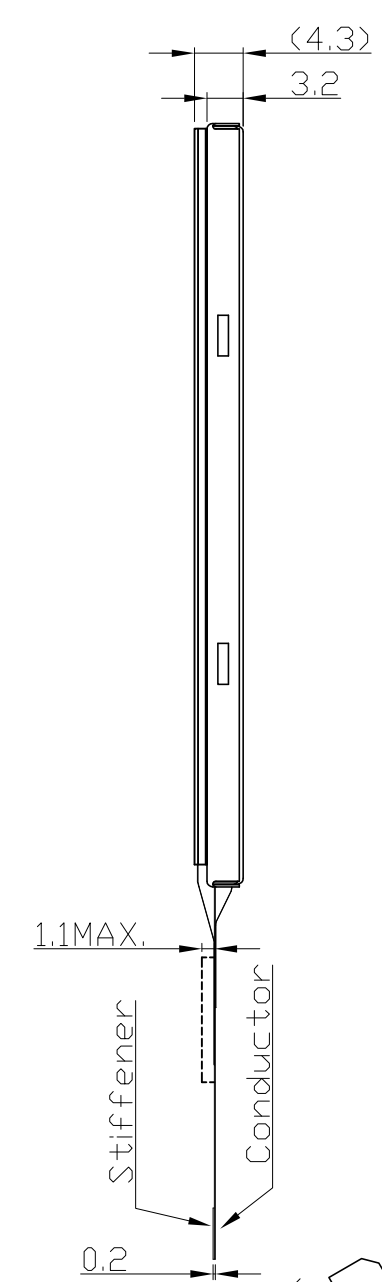

K1 Details
(Conductor Side)
SCALE=3/1

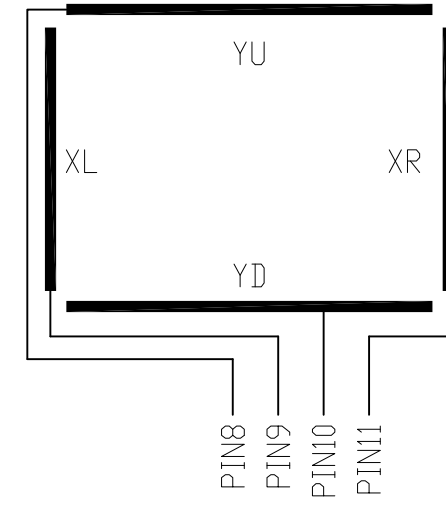

Touch Panel Logic
SCALE=free

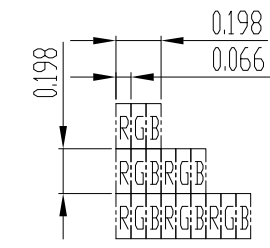

Pixel Details
SCALE=30/1

PRELIMINARY

K1 Terminal	
No.	Pin Name
1	VLED1+
2	VLED1-
3	VLED1-
4	VLED2+
5	VLED2-
6	VLED2-
7	CPWM
8	YU
9	XL
10	YD
11	XR
12	SD0
13	SDI
14	SCL
15	CSB
16	VSS
17	DE
18	VS
19	HS
20	DISP
21	CLK
22	VSS
23	B7
:	:
30	B0
31	G7
:	:
38	G0
39	R7
:	:
46	R0
47	RESETB
48	DVDD
49	AVDD
50	AVDD
51	VSS

C			
B			
A			
Rev	Note	Date	
Dwg	Title	LMT043DNAFFWD-NNA-1 Outline Dwg	
Dwg No.	MK-004159-1-1	Date	2012-09-07
Scale	3/2	Tol.	±0.5
		Unit	mm
		Paper Size	A3
Approved	Checked	Drawn K.C.	

