


- Note:
- *1. LCD Display Type: TFT.Transmissive
 - *2. Pixel Arrangement: RGB-SPRIPE
 - *3. Operating Voltage (VCC): 3.3V
 - *4. Backlight Supply (BLVCC): 5.0V
 - *5. Backlight : LEDs
 - *6. Color Depth : 262k colors
 - *7. Operating Temperature : -20°C~70°C ▲
 - *8. Storage Temperature : -30°C~80°C
 - *9. K2: 6Pin, P2.0, JST B6B-PH-K-S or equivalent

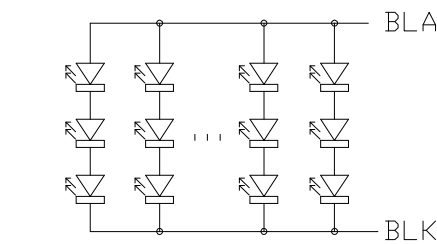

Backlight Circuit
(No. of LEDs = 3x10pcs)
Scale=free

C				
B				
A	Update Note	Yang	2012-05-15	Date
Rev	Note			Date
Dwg	Title	LMT057DCDFWU-NBN Outline Dwg		
Dwg	No.	MK-003606a-1-1	Date	2011-04-09
Scale	3/4	Tol. ±0.5	Unit mm	Paper Size A3
Approved		Checked		Drawn Yang Lin
TOPWAY				

K1 Terminal No	Pin Name
1	DGND
2	DCLK
3	HSYNC
4	VSYNC
5	GND
6	R0
7	R1
8	R2
9	R3
10	R4
11	R5
12	GND
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	GND
20	B0
21	B1
22	B2
23	B3
24	B4
25	B5
26	GND
27	DEN
28	VCC
29	VCC
30	LRC
31	UDC
32	NC
33	GND

K2 Terminal No	Pin Name
1	BLVCC
2	BLVCC
3	BLON
4	BLADJ
5	BLGND
6	BLGND